


Other models in this range:
 MF 46 - MF 47 - MF 56
 MF 59 Split - MF 68 Split - MF 66
 MF 69 Split - MF 86 - MF 88 Split

Modular Super-Flake Ice Machine up to 600 kg



Electronic Controls

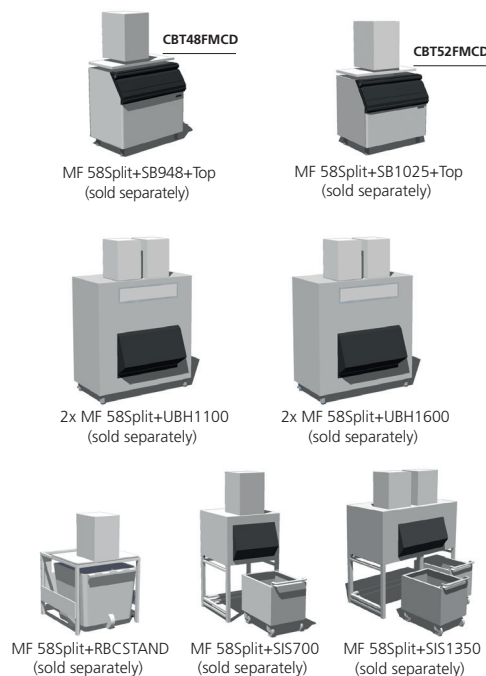

Features

- Modular Superflake ice machine, production up to 600 kg in 24 hours
- Split unit, supplied with evaporator only, needs to be connected to remote condensing unit or central cooling system (low temperature)
- Stainless steel auger and freezing cylinder (evaporator)
- Equipped with an electronic control board
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry).
- Long-lasting stainless steel ball-bearings.
- Double protection – electronic rotation sensor and drive coupling -on gear motor and gear reducer
- Low- water sensor protection on refrigeration and gear motor system
- Optical ice level sensor for machine shut down.
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics.
- Side panels are removable on all four sides to ease maintenance and after-sales service operations.
- PS plastic top cover.
- Reduced height to ease installation.

Optional Features (special order):

- UV lamp for bacterial control.
- Anti-scale, anti-algae water filtration system.

MF 58 Split Technologies



	10°C : 10°C		21°C : 15°C		
	[kg]	[lb]	[kg]	[lb]	[WxDxH mm]
MF 58 Split	600	1322	570	1256	538x663x790
					[WxDxH inches]
					213/16" x 261/8" x 311/8"
			[V/Hz/ph]	R 404A	
			230/50/1		

Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual umidity, making it relatively dry and compact.



Residual humidity content 15%

This product qualifies for the following listings:



2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001

www.scotsman-ice.it
 www.scotsman-ice.com
 Models and specifications are subject to change without notice.

Other models in this range:
 MF 46 - MF 47 - MF 56
 MF 59 Split - MF 68 Split - MF 66
 MF 69 Split - MF 86 - MF 88 Split

Modular Super-Flake Ice Machine up to 600 kg

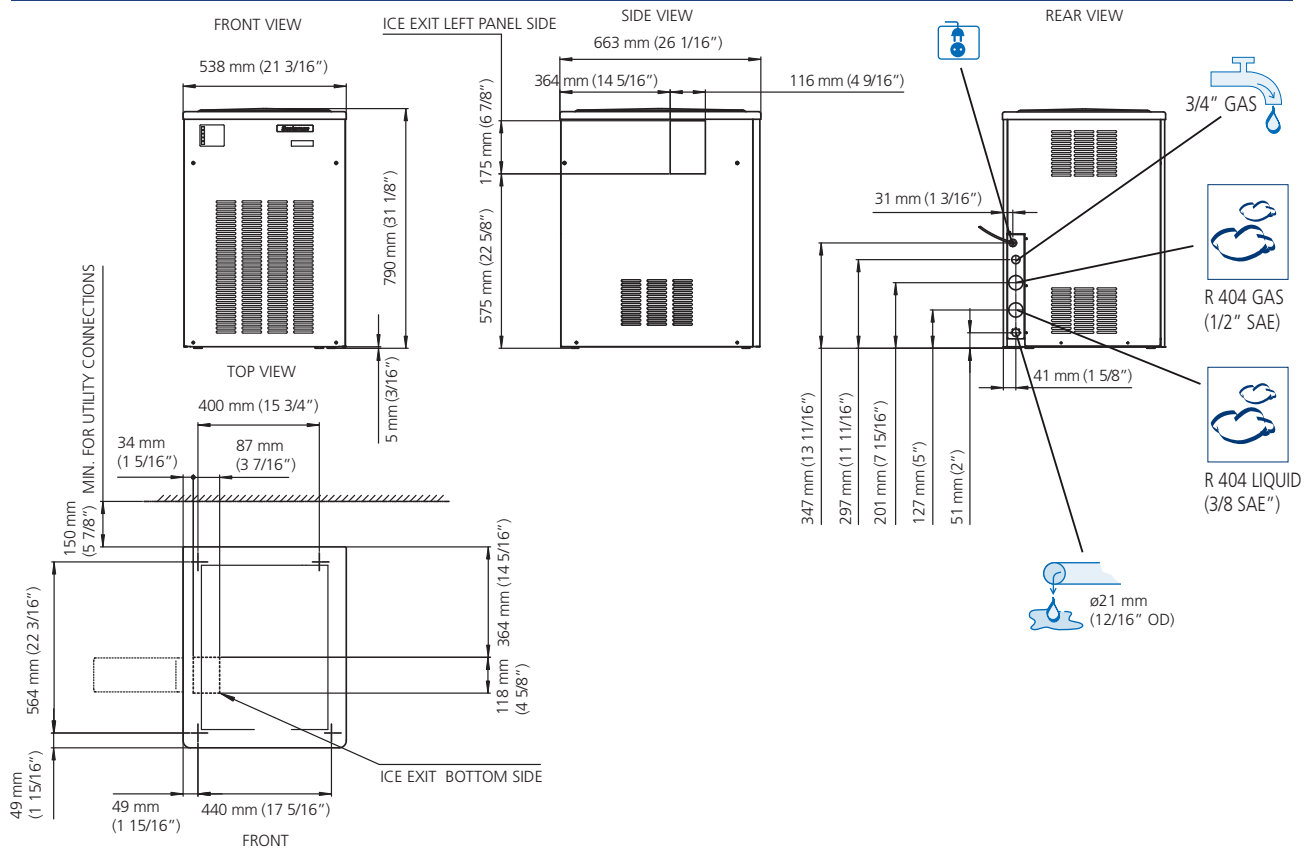

MF 58 SPLIT

T _{in} /C	T _{out} /°F				kg
	50°	60°	70°	90°	
10-38°	600	570	540	480	kg
50-100°	1322	1256	1190	1058	lb

24h

Minimum	Maximum
10°C (50°F)	43°C (110°F)
5°C (41°F)	38°C (100°F)
-10%	+10%
1 bar 14 psi	5 bar 70 psi

	R404A (T. ev: -16°C or 3,2°F; T. cond. +40°C or 104°F)		[W] [A]		[kg] [lb]		[kg] [lb]	
MF 58 split	[W]	[Btu/h]	[W]	[A]	[kg]	[lb]	[kg]	[lb]
	2300	7843	200	0,7	62	136	71	156

IMPORTANT NOTICE:
 Models and specifications are subject to change without notice.
 This spec sheet is meant for commercial purpose only.
 For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com