

# NW 1008

## Modular Ice Machine up to 485 kg

Item #:
Project:
Quantity:



### FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW L 1008  
Large Cube 12 g  
W 29 x D 22 x H 29 mm



NW 1008  
Full Cube 10 g  
W 22 x D 22 x H 22 mm



NW H 1008  
Half Cube 6 g  
W 10,5 x D 22 x H 29 mm

### CONDENSING SYSTEM

Air cooled  
Remote condenser  
Water cooled

### REFRIGERANT GAS

R404A

### VOLTAGE V/Hz/ph

230/50/1  
380/50/3

### RECOMMENDED BINS

Head	Bins		kg
NW 1008	✓	<b>SB393</b>	181
	✓	<b>SB530</b>	243
	CBT48EAMCD	<b>SB948</b>	406
	CBT52EAMCD	<b>SB1025</b>	478
	●	<b>UBH1100</b>	553
	●	<b>UBH1600</b>	812

### LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

Certifications:



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	35°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)



Modular Ice Machine up to 485 kg

# NW 1008

Modular Ice Machine up to 485 kg


Item #:
Project:
Quantity:

Modular Ice Machine up to 485 kg

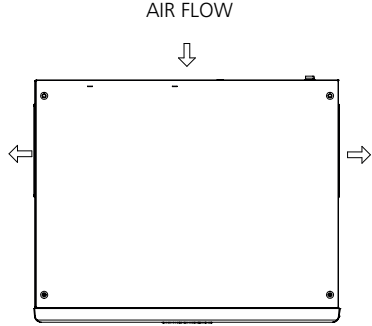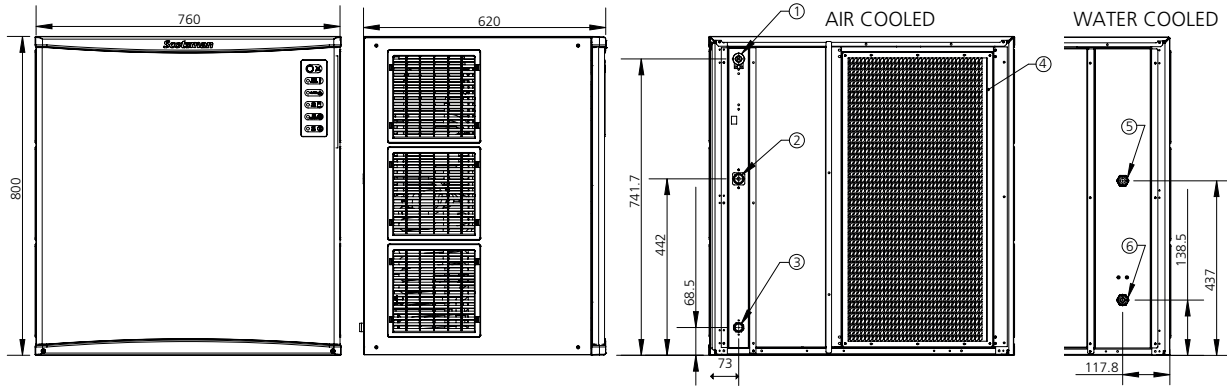

UNIT OF MEASUREMENT: mm

1. CORD SET
2. 3/4" GAS WATER INLET
3. 13/16" OD - WATER OUTLET
4. AIR INLET / AIR FILTER
5. 3/4" GAS-WATER OUTLET
6. 3/4" GAS-WATER INLET  
WATER COOLED UNIT ONLY

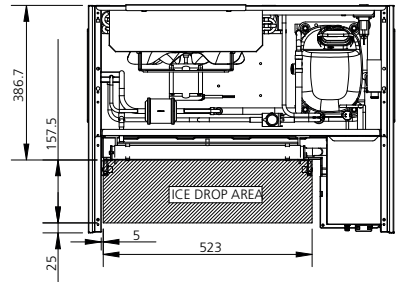

UNIT DATA	Version		Compressor		Circuit wires		Max. fuse size
	Version	Voltage	Btu/h	W	No.	Ømm²	A
Size (W x D x H)	760 x 620 x 800 mm						
Net weight	105 kg						
SHIPPING DATA	Carton (W x D x H)	830 x 690 x 990 mm					
	Weight	119 kg					
	NW 1008 AS	230/50/1	24909	7300	5	2.5	30
	NW 1008 AS	380/50/3	24909	7300	5	2.5	10
	NW 1008 ASR	230/50/1					
	NW 1008 ASR	380/50/3					
	NW 1008 WS	230/50/1	24909	7300	5	2.5	30
	NW H 1008 AS	230/50/1	24909	7300	5	2.5	30
	NW H 1008 AS	380/50/3	24909	7300	5	2.5	10
	NW H 1008 ASR	230/50/1					
NW H 1008 ASR	380/50/3						
NW H 1008 WS	230/50/1						
NW L 1008 AS	230/50/1						
NW L 1008 WS	230/50/1						

Version	Condensation	Voltage	24 h ice production kg			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h		
NW 1008 AS	Air	230/50/1	485	456	365	13.1	45.0	22.1	2100
NW 1008 AS	Air	380/50/3	485	456	365	13.1	53.0	23.1	2500
NW 1008 ASR	Remote	230/50/1	485	456	365				
NW 1008 ASR	Remote	380/50/3	485	456	365				
NW 1008 WS	Water	230/50/1	450	445	395	12.1	48.0	136.0	2100
NW H 1008 AS	Air	230/50/1	485	456	365	13.1	45.0	22.1	2100
NW H 1008 AS	Air	380/50/3	485	456	365	13.1	53.0	23.1	2500
NW H 1008 ASR	Remote	230/50/1	485	456	365				
NW H 1008 ASR	Remote	380/50/3	485	456	365				
NW H 1008 WS	Water	230/50/1							
NW L 1008 AS	Air	230/50/1							
NW L 1008 WS	Water	230/50/1							

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions