# Scotsman<sup>®</sup> Ice Systems

## Self Contained Ice Machine 25 kg

Item #:
Project:
Quantity:



#### **FEATURES**

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior. Simple and reliable electromechanic controls.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- Legs are not included and must be ordered separately as an accessory.



EC M 46

Medium Gourmet 20 g
Ø 30 x H 34 mm

### CONDENSING SYSTEM

Air cooled Water cooled

REFRIGERANT GAS

R134a

INTERNAL BIN CAPACITY

9 kg

VOLTAGE V/Hz/ph

230/50/1 230/60/1

#### RTIFICATION



#### **OPERATING REQUIREMENTS**

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	+10

ORTANT NOTICE:

This spec sheet is meant for commercial purpose only.

For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**Apple store
Google play
Windows store

.


www.scotsman-ice.it www.scotsman-ice.com 17 April 2019

## **EC 46**

# **Scotsman**° Ice Systems

## Self Contained Ice Machine 25 kg

Item #:
Project:
Quantity:

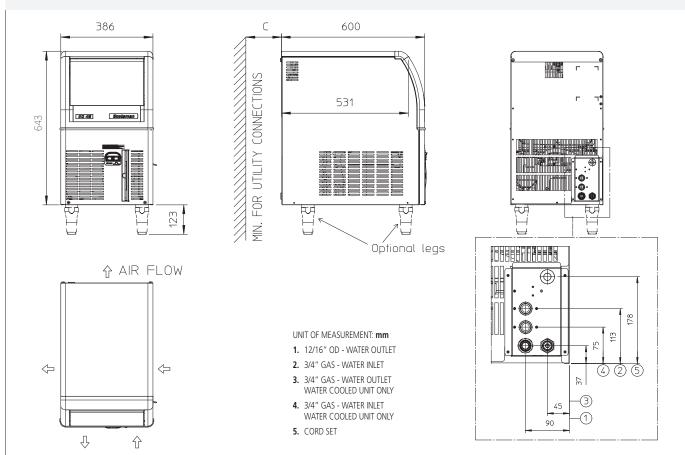

UNIT DATA		SHIPPING DATA	SHIPPING DATA				
Size (W x D x H)	386 x 600 x 645 mm	Carton (W x D x H)	460 x 670 x 760 mm				
Net weight	37 kg	Weight	44 kg				
						1	$\overline{}$

		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version		10°C/10°C	21°C/10°C	32°C/21°C	kWh/	kWh/	141	W	w	No. x Ømm²	Α
	Voltage	kg	kg	kg	100 kg	24h	l/h				
ECM 46 AS	230/50/1	25	23	19	40.8	8.0	3.2	350	800	3 x 1.5	10
ECM 46 WS	230/50/1	25	23	21	31.0	6.5	27.3	350	800	3 x 1.5	10
ECM 46 AS	230/60/1	25	24	20	42.3	8.3	3.4	450	900	3 x 1.5	10

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions