Modular Ice Machine 120 kg

MF 26

Modular Ice Machine 120 kg



Item #:
Project:
Quantity:



FEATURES

- Produces Flake Ice, extruded at a temperature just below 0°C, with25% residual water content, hence very rich in moisture.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in PS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Electronic control board with self diagnostic and malfunction alarms.

	MF 26 Flake ice Residual water content 25%	CONDENSING	RECOMMENDED BINS				
		SYSTEM	Head	Bins		kg	
		Air cooled Water cooled		~	SB193	129	
			MF 26	~	SB322	168	
				CBT30EFSD	SB393	181	
		REFRIGERANT GAS		CBT30EFSD	SB530	243	
				CBT42EFSD	SB550	252	
		R134a		CBT48FMCD	SB948	406	
				•	SIS300	137 + 73	
		VOLTAGE V/Hz/ph 115/60/1 230/50/1 230/60/1	: Ice chute	mbination betwe cut-out performe x : need additiona	d upon install	and bin ation	
CERTIFICATIONS		OP	PERATING REQUIREMENTS				

IMPORTANT NOTICE:

agion

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

♦WRAS

Download our free **App Scotsman Ice**Apple store
Google play
Windows store

Air temperature
Water temperature

Water pressure

Electrical voltage

www.scotsman-ice.it www.scotsman-ice.com

Minimum

10

1 bar (14 psi)

-10%

Maximum

43

5 bar (70 psi)


+10%

MF 26

Scotsman[®]

Modular Ice Machine 120 kg

Item #: Project: Quantity:

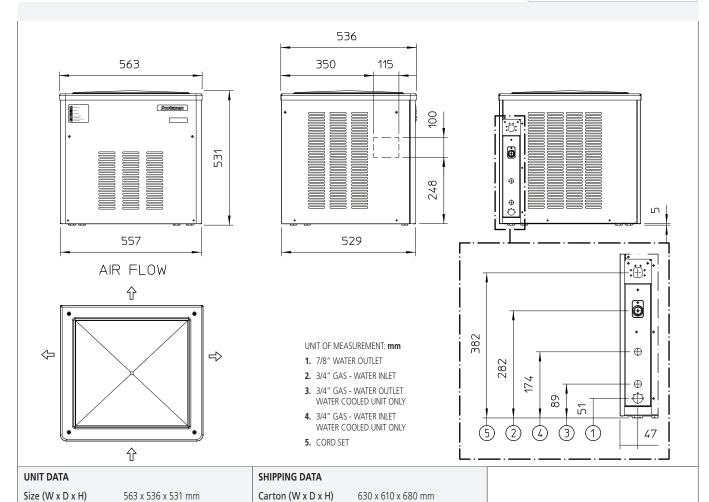

Net weight	45	kg	\	Veight	52 kg						
24 h ice produ °C Amb. / °C			h ice productio C Amb. / °C Wa		Ene consum	ergy ption (*)	Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/	kWh/	l/h	w	W	No. x Ømm²	А
		kg	kg	kg	100 kg	24h					
MF 26 AS	230/50/1	120	114	95	11.4	10.8	4.6	500	1300	3 x 1.5	10
MF 26 WS	230/50/1	120	114	95	10.0	9.5	29.0	400	1300	3 x 1.5	10
MF 26 AS	115/60/1	140	135	109	12.6	13.7	4.8	650	1400	3 x 1.5	10
MF 26 AS	230/60/1	120	114	95	11.4	10.8	4.6	500	1300	3 x 1.5	10
MF 26 WS	230/60/1	120	114	95	10.0	9.5	29.0	400	1300	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions