

## Mod. **BF081AG**

FR6V2242B5120



### **“G” CONTROL FUNCTIONS**

- Pre-cooling function
- Soft and Hard timed or core probe blast chilling
- Soft and Hard timed or core probe freezing
- Infinite timed cycle with settable room set-point
- Customised blast chilling and freezing cycles (99 cycles can be memorised)
- Automatic storing at end of blast chilling/freezing cycle
- Automatic recognition of the core probe, if inserted into the product to blast chill/freeze
- Core probe heating
- Timed manual defrosting
- Sterilisation (optional)
- LCD
- Connection via card to printer or PC (HACCP)

### **MAIN FEATURES**

- External sides and top in AISI 304 18/10 stainless steel th. 0.6mm (Scotch-Brite satin finish)
- Door in stainless steel th. 0.8mm (Scotch-Brite satin finish)
- Inner in stainless steel with rounded corners
- Internal base moulded for containment with central drain connection for discharge of water used for washing
- Insulation in high density (42 kg/m<sup>3</sup> approx.) expanded polyurethane, 60 mm thick, HCFC-free
- Copper-aluminum evaporator with cathodolysis anti-corrosion treatment
- Hinged opening deflector for evaporator cleaning
- High performance copper-aluminum condenser
- Heating element in the door frame
- Ergonomic handle across entire height of door and magnetic seals on all 4 sides of the door.
- Self-closing door with block in open position at 100°
- Stainless steel feet Ø 2" height-adjustable H 70÷100mm with anti-scratch cap
- Heated core probe in blast freezer for an easy extraction

### **INTERNAL SETUP:**

- Shelf or tray racks in 18/10 stainless steel encased on the sides of the room, easily removable for washing
- Shelf racks in polished stainless steel wire suitable to support GN1/1 shelves and EN trays (600 x 400 mm)
- Core probe

### **COOLING SYSTEM:**

- Indirect blowing electronic fans, efficient but gentle on food
- Hermetic Compressor
- R452A ecological refrigerant fluid
- Evaporators with large exchange surfaces, for high cooling efficiency

Mod. **BF081AG**

FR6V2242B5120

Manual defrosting device and condensate evaporation system without use of electrical energy

High capacity liquid/gas heat exchanger

**CONTROLS AND SAFETY DEVICES:**

Control and command circuit board

Equipped with high-visibility custom display, which highlights the status of the appliance at all times

The microprocessor can memorise up to 99 programs

Compressor protected by termic overload cut-out with automatic reset

Micro-switch stops internal fan when door is open

**VERSIONS / ACCESSORIES (OPTIONALS):**

Remote condensing unit

Condensing unit with water cooling unit

Revolving castors with brake kit

UVC kit (sterilizing lamp)

Printer kit

## Mod. **BF081AG**

FR6V2242B5120




MODELLO:		BF081AG
NET WIDTH	mm	790
NET DEPTH	mm	800
90° OPENING DOOR DEPTH	mm	1550
NET HEIGHT	mm	1320
NET WEIGHT	Kg	142
GROSS WIDTH	mm	850
GROSS DEPTH	mm	880
HEIGHT GROSS	mm	1475
GROSS WEIGHT	Kg	157
GROSS VOLUME	m <sup>3</sup>	1.01
NET HEIGHT DOOR	mm	630
DOOR OPENING WIDTH	mm	670
INNER DEPTH	mm	460
INSULATION THICKNESS	mm	60
N° OF COMPARTMENTS	n°	1
N° OF DOORS	n°	1
INTERNAL SETUP		8-pos. tray holder wire structure
POWER SUPPLY		220-240/1/50
PITCH	mm	65
LOADING CAPACITY n° TRAYS GN	n°	8 trays
CHILLING CAPACITY	Kg	25
FREEZING CAPACITY	Kg	16
REFRIGERANT	gas	R452A
NOMINAL CURRENT	A	7.7
SET LP-HP	bar	0,2 (0,7) - 27 (4)
DEFROST TYPE		Door Open
ABSORBED ELECTRICAL POWER	W	1565
COOLING POWER	W	1340
NOIS LEVEL	dB(A)	< 70
QUANTITY CHARGE GAS	g	1260
TEMPERATURE 2	°C	-18
TEMPERATURE	°C	3
Energy consumption for blast chilling function	[kWh/Kg]	0.08
Energy consumption for freezing function	[kWh/Kg]	0.27
Blast chilling cycle time 65 > +10 °C		109
Shock freezing cycle time 65 > -18 °C		270

(\*) For mod. BC\_\_Evap. Temperature -10°C - Cond. temperature +40°C

(\*) For mod. BF\_\_Evap. temperature -25°C - Cond. Temperature +40°C

Mod. **BF081AG**

FR6V2242B5120

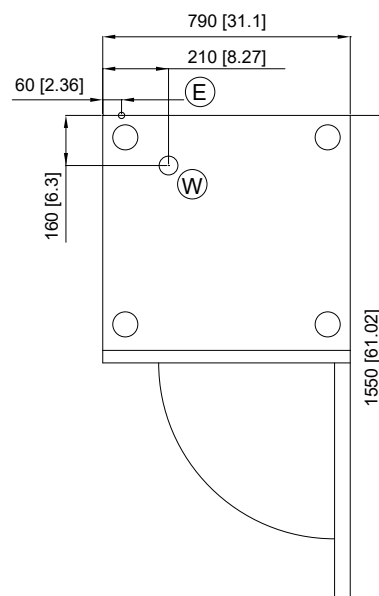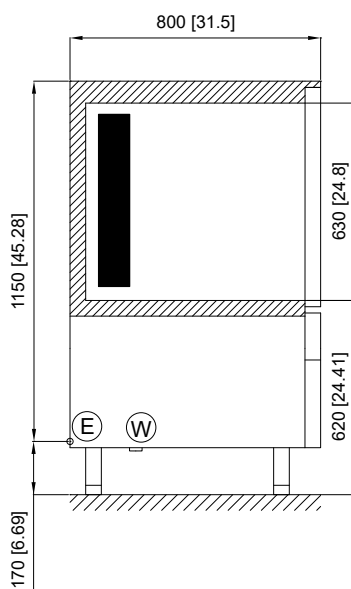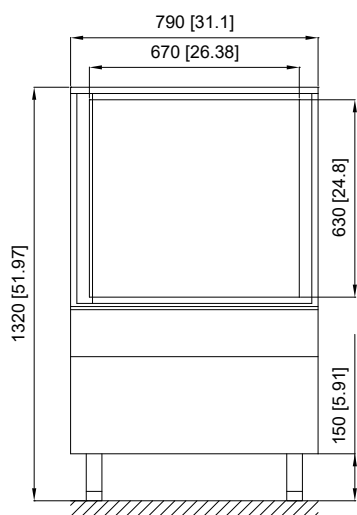

ⓔ CONNESSIONE ELETTRICA  
ELECTICAL CONNECTION

Ⓜ CONNESSIONE IDRICA  
DRAIN CONNECTION

DIMENSIONI mm  
DIMENSIONS [in]