

Self Contained Ice Machine up to 137 Kg



EASY-FIT
Progressive Water Discharge

Features

- Produces individual Gourmet crystal clear supercubes
- Up to 137 kg (302 lbs) daily ice cubes production
- Up to 50 kg (110 lbs) ice storage capacity
- Resistant stainless steel exterior
- Front panel in & out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine Maintenance visible alarm light on front panel
- Ergonomically designed ice-storage access, with disappearing door
- Door-closing movement dampening system
- Vapor-based microbial control system pouch in ice-storage area
- Optional PWD System for remote water drain (easy -fit installation)
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-404A Refrigerant
- 3 years manufacturer warranty

EC 206 Technologies

Horizontal Gourmet, Adaptive Cycle Control, Super Scale, Water Purity System, Total Hygiene Concept, Built-in Facility, agion, Scale Guard, Clean met, ON OFF, Here your Logo

EC 206 Technologies

Model	Water Inlet	10°: 10°C			21°: 15°C			Ice Storage Capacity	Dimensions (mm)
		[kg]	[lbs]	N°*	[kg]	[lbs]	N°*		
ECS 206 AS	☼	100	220,5	2500	91	200,5	11375	50 110 6250	[WxDxH mm] 1250x620x779-859
ECS 206 WS	☼	TBA	TBA	TBA	TBA	TBA	TBA	50 110 6250	[WxDxH inches] 49"x24"x31"/33"
ECM 206 AS	☼	130	285,5	6500	115	253,5	5750	50 110 2500	
ECM 206 WS	☼	137	302,5	6850	127	280	6350	50 110 2500	
ECL 206 AS	☼	126	278	3230	113	249	2895	50 110 1280	
ECL 206 WS	☼	126	278	3230	119	262	3050	50 110 1280	

*Estimate number of small, medium or large size gourmet cubes. Standard legs 80 mm high included.

Small Gourmet 8 g, Medium Gourmet 20 g, Large Gourmet 39 g

Ø 21 x H 25 mm, Ø 29 x H 34 mm, Ø 38 x H 41 mm



Noiseless bin door



Front ON-OFF Switch



Storage bin antibacterial pouch & holder



Proximity condenser air filter



Pivoting rear wheels



Hygienic scoop holder



Routine Maintenance Alarm



Water inlet
Water outlet (Progressive Water Discharge)
Water Discharge up to 15 mt away and 1.7 mt high with PWD

This product qualifies for the following listings:




3 Years Warranty
Subject to certain limitations and exclusions

Certified ISO 9001

www.scotsman-ice.it
www.scotsman-ice.com
Models and specifications are subject to change without notice.

11/2016

Self Contained Ice Machine up to 137 Kg

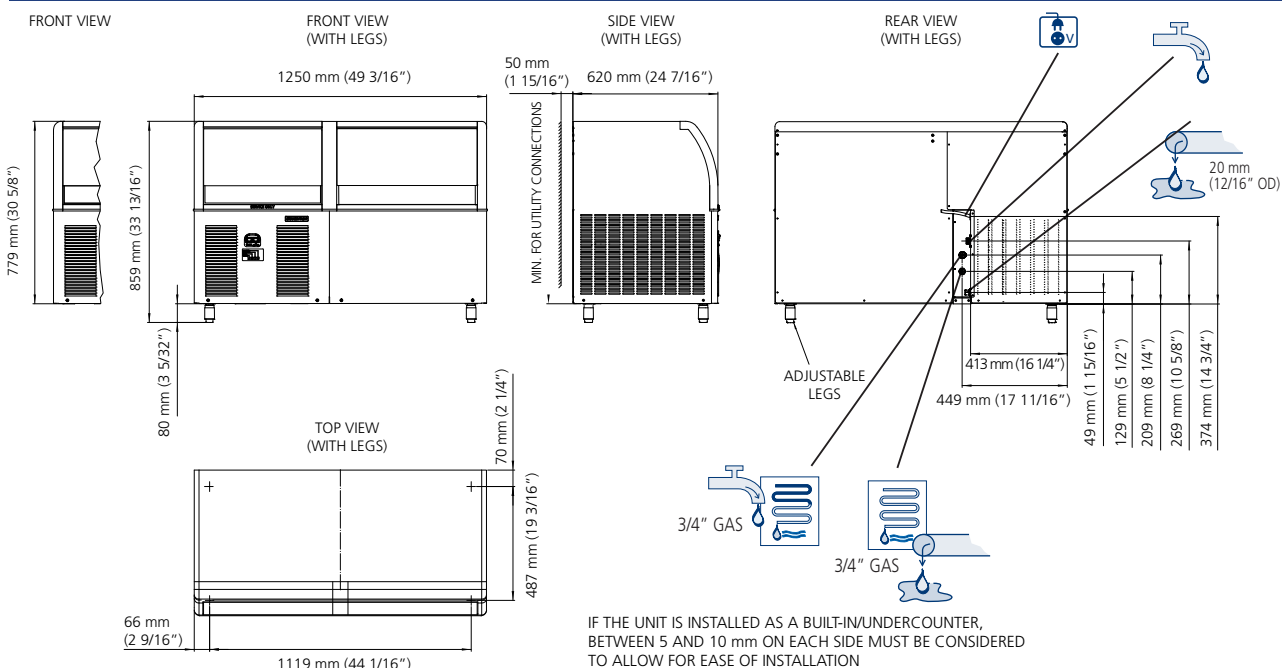

EC 206 AIR COOLED

°C / °F	°C / °F				kg
	50° / 10°	60° / 15°	70° / 21°	90° / 32°	
10°	130	122	114	98	kg
50°	286.5	269	251	216	lbs
21°	123	115	107	91	kg
70°	271	253.5	236	200.5	lbs
32°	99	95	91	83	kg
90°	218	209.5	200.5	183	lbs
38°	87	83	79	71	kg
100	191.5	183	174	156.5	lbs



EC 206 WATER COOLED

°C / °F	°C / °F				kg
	50° / 10°	60° / 15°	70° / 21°	90° / 32°	
10°	137	128	119	101	kg
50°	302	282	262.5	222.5	lbs
21°	136	127	118	100	kg
70°	300	280	260	220.5	lbs
32°	126	119	112	98	kg
90°	278	262.5	247	216	lbs
38°	124	117	110	96	kg
100	273.5	258	242.5	211.5	lbs



Minimum

10°C (50°F)



Maximum

40°C (104°F)

5°C (41°F)

-10%

1 BAR
14 psi

35°C (95°F)

+10%

5 BAR
70 psi

Model	Cooling Type	Capacity [Btu/h] [W]	Ice Output [kg] [lbs]	Power [W]	FUSE	Energy [kWh] - 100 Kg	Water [l/h] [gal/h]	Weight [kg] [lbs]	Dimensions [kg] [lbs]
ECS 206 AS	Air Cooled	7165 2100	1,5	950	16	29.8	7.5 2	84 185	97 213
ECS 206 WS	Water Cooled	TBA TBA	TBA	TBA	TBA	TBA	TBA TBA	84 185	97 213
ECM 206 AS	Air Cooled	7165 2100	1,5	950	16	22.9	11.5 3	84 185	97 213
ECM 206 WS	Water Cooled	7165 2100	1,5	700	16	15.5	104 27.5	84 185	97 213
ECL 206 AS	Air Cooled	7165 2100	1,5	950	16	21.6	9.6 2.5	84 185	97 213
ECL 206 WS	Water Cooled	7165 2100	1,5	700	16	15.5	116 30.6	84 185	97 213

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg